

Údaje aktuálne k dátumu: 11-04-2026 13:43

Odkaz na produkt: <https://www.cncworld.sk/akrylov-zkladn-nter-dz-pre-uv-tlaciarne-p-756.html>




Akrylový základný náter DZ pre UV tlačiarne

Cena s DPH	129.00 €
Cena bez DPH	104.88 €
Skoršie cena	159.00 €
Dostupnosť	Dostupný
Odosielame do	48 hodín
Katalógové číslo	009INK
Kód výrobcu	X1
Výrobca	CNCTech

Popis produktu

Podkladová kvapalina DZ na akryl pre UV tlačiarne

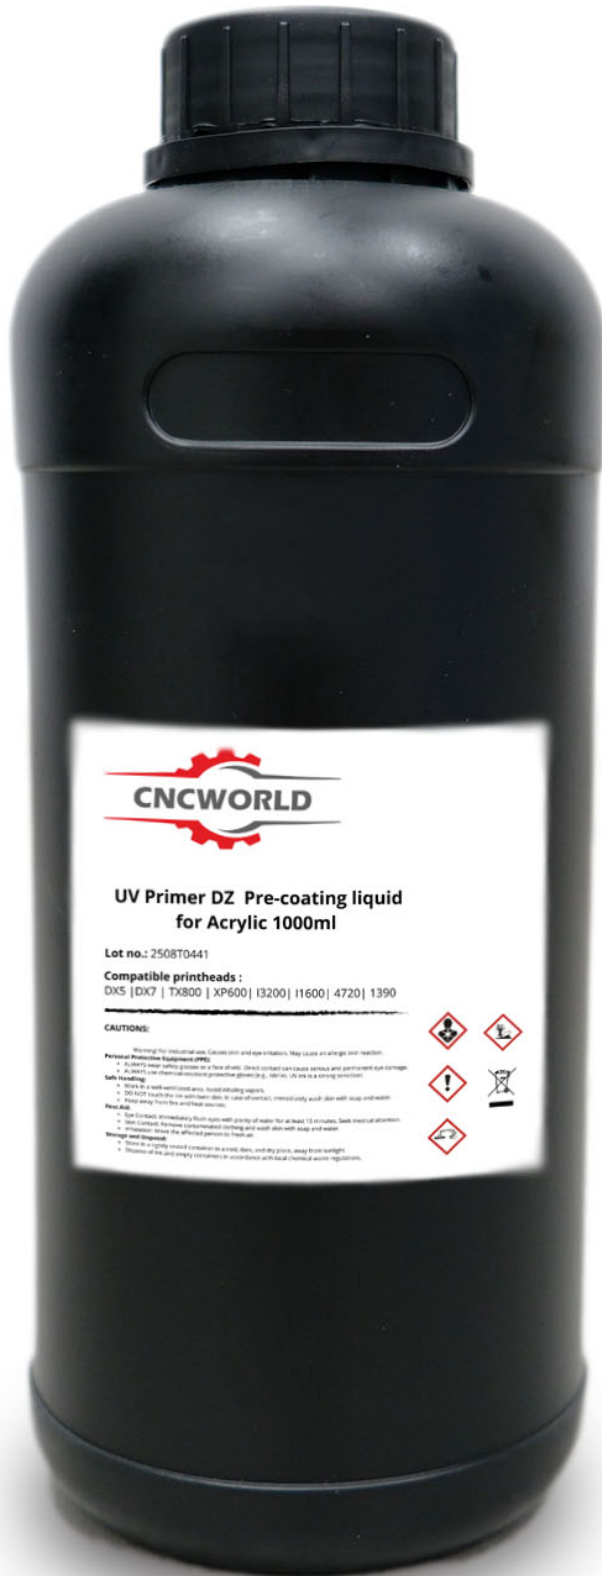

CNCWORLD

**UV Primer DZ Pre-coating liquid
for Acrylic 1000ml**

Lot no.: 2508T0441

Compatible printheads :

DX5 | DX7 | TX800 | XP600 | I3200 | I1600 | 4720 | 1390

CAUTIONS:

Warning: For industrial use. Causes skin and eye irritation. May cause an allergic skin reaction.
Personal Protective Equipment (PPE):
• Always wear safety glasses or eye shields. Direct contact can cause serious and permanent eye damage.
• Always use flame-retardant protective gloves (e.g. nitrile). It may be a strong irritant.
Self-cleaning:
• Works on a wide variety of printhead models. Avoid blocking nozzles.
• Do not use on printhead models not supported by the manufacturer. Immediately wash skin with soap and water.
• Keep away from fire and heat sources.
First Aid:
• Eye Contact: Immediately flush eyes with plenty of water for at least 15 minutes. Seek medical attention.
• Skin Contact: Remove contaminated clothing and wash skin with soap and water.
• Inhalation: Remove the affected person to fresh air.
Storage and Disposal:
• Store in a tightly sealed container in a cool, dark, and dry place, away from sunlight.
• Recycle old and empty containers in accordance with local chemical waste regulations.



Podkladová kvapalina na akryl (UV Primer) je špecializovaný chemický prostriedok, ktorý slúži ako **adézny most** medzi povrchom materiálu a UV atramentom. Je to kľúčový prvok procesu UV tlače na náročných podložkách.

Posilňuje spojenie atramentu so syntetickými povrchmi, zvyšuje ich **elasticitu a odolnosť** proti poškrabaniu, čo je nevyhnutné pri výrobe reklamných predmetov a tabúl.

Doba použiteľnosti: minimálne 6 mesiacov

Kompatibilné tlačové hlavy: DX5 | DX7 | DX8 | TX800 | XP600 | I3200 | I1600 | 4720 | 1390